





Extremely fine (0.12mm) metal wires braided into a cylinder mesh provides excellent flexibility

**Feature**

- Flexible material can be used by wrapping around cables or inserting cables in the mesh cylinder.

**Material**

- SN plated copper wire

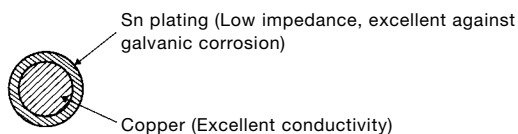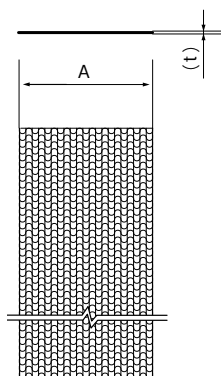

Unit: mm

Part No.	Dimensions	
	A	(t)
MT-17-CT	17	0.4
MT-25-CT	25	
MT-30-CT	30	
MT-35-CT	35	
MT-40-CT	40	
MT-55-CT	55	0.8
MT-85-CT	85	
MT-95-CT	95	
MT-120-CT	120	
MT-150-CT	150	
MT-175-CT	175	
MT-230-CT	230	

Contact us for other sizes not listed above.

FLAT CABLE SHIELD/FRCSR



Lightweight, flexible material offers effective EMI shielding for ribbon cables at low cost.



**Feature**

- Adhesive tape for convenient closing, No tools needed for installation on cable.
- Installation on pre-connected or wound cables is also possible.
- Grounding wire terminal can be attached.

**Material**

- Conductive layer / Aluminium foil
- Insulation layer / Polyurethane + PET film
- Fixture part / Double-sided adhesive tape with release liner

Outer : Insulation layer (Urethane)  
Inner : Conductive layer (Aluminium foil)

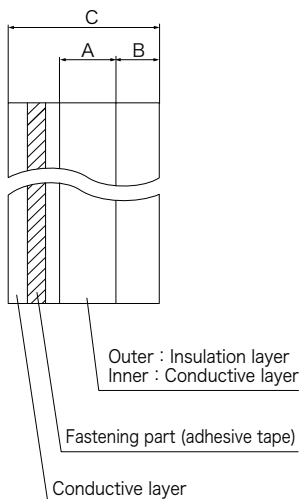

Unit: mm

Part No.	A	B	C
FRCSR-15	15	14	43
FRCSR-22	22	17	59
FRCSR-28	28	26	80
FRCSR-35	35	29	93
FRCSR-40	40	35	110
FRCSR-46	46	36	118
FRCSR-53	53	45	143
FRCSR-66	66	56	178